




AAT Resurfacing – Stage 2 Australian Amalgamated Terminals



After the successful completion of the first stage of asphalt resurfacing at AAT's Port of Brisbane facility, Civcorp's excellent work quality was recognised in the award of the second stage of works. The second stage involved service pit lid and grate upgrades as well as extensive resurfacing and linemarking.



Profiling was completed on over 20,000m² of existing asphalt and the profiled product was recycled on other Port of Brisbane projects. High traffic areas of the terminal facility experience very high point loads due to container lifters travelling at speed moving shipping containers. Thus deep lift asphalt pavement designs were required to ensure the longevity of the surface. In total 1700 tonnes of EME2 asphalt and 3720 tonnes of AC14-A15E asphalt were laid.

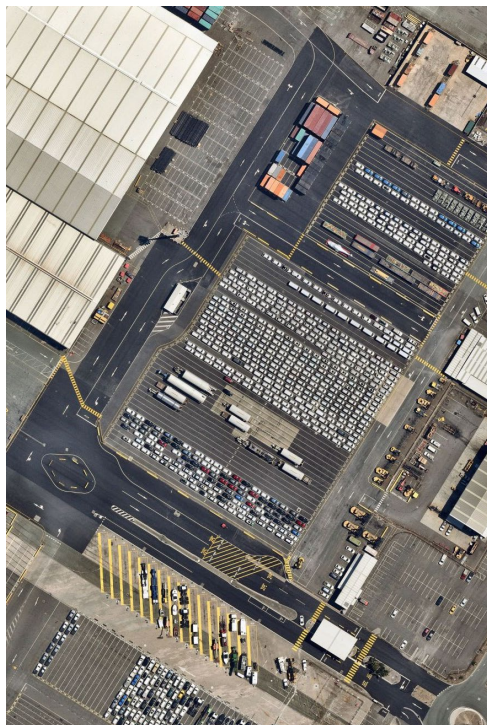

The terminal facility is also subject to Maritime Security and complex traffic control requirements. Civcorp met these client needs and completed the project ahead of schedule.

Project Data Sheet

Client:

PPQ for Australian Amalgamated
Terminals and Port of Brisbane

Project Location:

Port of Brisbane

Contract Value:

\$1,350,000

Year completed:

2020

Scope:

Service Pit Lid Install
Stormwater Grate Install
Profiling
Asphalt
Concrete
Linemarking
Complex Traffic Control

ALL ENQUIRIES

Phone: +61 7 3807 9346

admin@civcorp.com.au

civcorp.com.au

3 Production Street
Beenleigh Qld 4207